

CRACKBOND® JF-90 HD

SEMI-RIGID EPOXY CONTROL JOINT FILLER



MOISTURE-INSENSITIVE, SEMI-RIGID EPOXY

Designed for filling joints on industrial floors exposed to heavy-duty hard-wheeled traffic, **CRACKBOND® JF-90 HD** may also be used as a crack filler for damaged floors with spalled cracks.

May be used in temperatures between 60 °F and 120 °F (16 °C and 49 °C).

It is compatible with plural component pumping equipment, and shaves easier than most competitors' products.

Features & Advantages

Semi-rigid formula allows for moderate joint movement

Shaves easily

Heavy-duty formulation with Shore A Hardness of 90

Paintable

Self-priming

Cures on damp surfaces

Protects joint edges from spalling due to wheeled traffic

Keeps joints free of debris and provides a continuous surface for weight loading


Easy to mix – 1:1 ratio

Does not embrittle with age



Innovation Engineered to Outperform

CRACKBOND® JF-90 HD is available in 2 and 10 gallon kits, and a 20.3 fl. oz. cartridge.

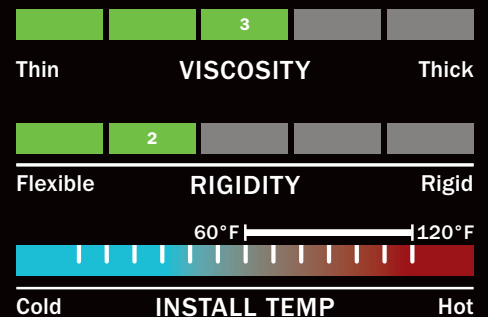

CRACKBOND®
JF-90 HD
Product Information

SEMI-RIGID EPOXY CONTROL JOINT FILLER



CARTRIDGE
& BULK

Material Properties

ASTM D2240 2 day Shore A Hardness – 90

Dispensing Tools & General Accessories

PART NO.	DESCRIPTION	PACKAGE QTY
TM22HD	22 OZ. MANUAL DISPENSING TOOL	1
TB22HD-A	22 OZ. BATTERY DISPENSING TOOL	1
TB22HDXL-A	22 OZ. BATTERY DISPENSING TOOL WITH EXTENDED CARRIAGE	1
TA22HD-A	22 OZ. PNEUMATIC DISPENSING TOOL	1
T12	10" NOZZLE FOR 9 & 22 & OZ. CARTRIDGES	1
T12-3PK	3 PACK T12; 12 EACH 3-PACKS PER CASE	36

Packaging

SIZE	PART NO.	QTY (PALLET QTY)
20.3 FL. OZ.	A20-JF90	12 (576)
2 GAL. KIT	B2G-JF90	1 (72 KITS)
10 GAL. KIT*	B5G-JF90-A / B5G-JF90-B	1 (18 KITS - 18A / 18B)

* Must order 1 each of component A and B

**NOW AVAILABLE FROM AN
AUTHORIZED DISTRIBUTOR NEAR YOU.**

**ADHESIVES
TECHNOLOGY[®]**
A Meridian Brand